

FIG. 1

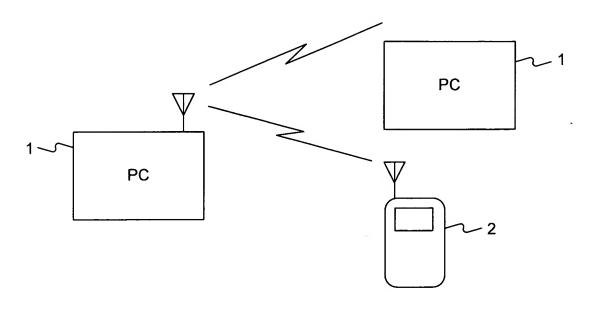


FIG. 2

<u>100</u>

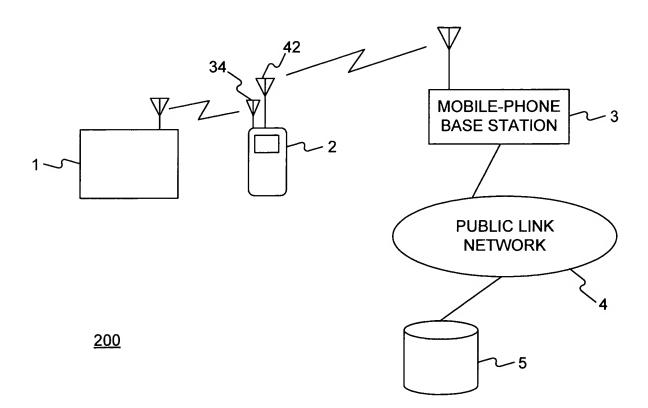




FIG. 5


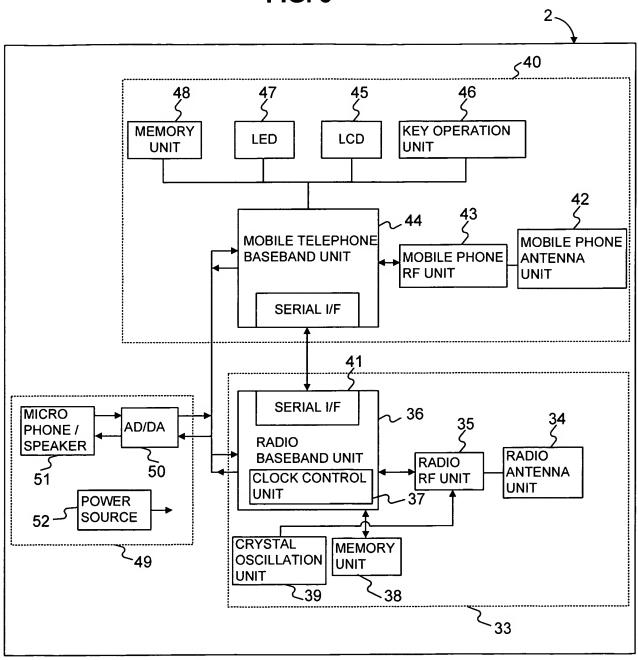




FIG. 6

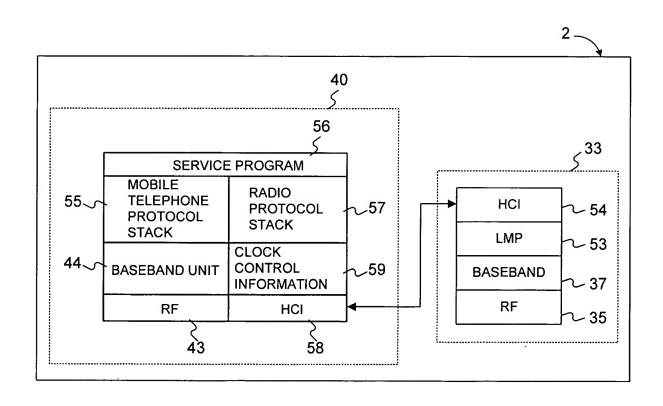

## SEP 2 6 2006 BY

### FIG. 11

	DETECTION MODE					
DISCONNECTION JUDGING CONDITIONS	INTERVAL (TJ) DETECTION DETEC MODE MODE MAINTENANCE TIME (Tm)					
	INTERVAL (TJ)					
	DETECTIONISSUE NUMBER- ESMODE OF-TIMES OF IN CONNECTION REQUEST (m)					
	DETECTION SMODE					
GING CONDITIONS	DETECTION DETECTION DETEC INTERVAL (TI) NUMBER-OF-TIMESMODE MAINTENANCE TIME (Tn)					
JUL NC	INTERVAL (TI)					
CONNECTION JUD	ISSUE NUMBER- OF-TIMES OF INQUIRY (n)					
FRIENDLY NAME		TERMINAL A	TERMINAL B	TERMINAL C	XXXX SETUP DEFAULT	
DEVICE FRIENI ADDRESS NAME		AAAA	8888	0000	×××	



### FIG. 12

CONDITION SETUP OBJECT: TERMINAL C								
CONNECTION DETECTING CONDITIONS SETUP ITEMS  INTERVAL  DETECTION NUMBER MAINTENANCE TIME  MS  ms	R-OF-TIMES							
INQUIRY DETECTION MODE O FIXED VARIABLE								
DISCONNECTION DETECTING CONNECTION REQUEST ISSUE NUMBER-OF-TIMES INTERVAL ms DETECTION NUMBER ms MAINTENANCE TIME  CONNECTION REQUEST DETECTION MODE ( ) FIXED ( ) VARIABLE	R-OF-TIMES							
CONNECTION REQUEST DETECTION MODE (O) FIXED ( ) VARIABLE								
REGISTER CANCEL								